



Excavator

Excavator XL

Excavator

PREMIUM SOLID

Trelleborg Excavator solid tires deliver superb performance in harsh environments.


Puncture proof construction and specialist compounds ensure maximum productivity for critical equipment in specialist applications. Trelleborg Excavator tires can be used in single or twin configurations offering enhanced stability and load bearing capabilities. Excavator is also available in a wider version, the XL.

Principally designed for use in waste and recycling, Trelleborg Excavator solid tires are also ideal for use in environments where the risk of tire damage can be high such as infrastructure development and timber.

Main Benefits

- Durable cut-resistant rubber compound eliminates downtime caused by flats and sidewall cuts
- Excellent stability
- Maintenance free

Application

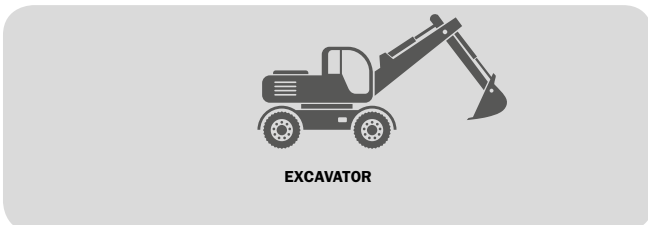

Tire Features



Excavator

PREMIUM SOLID

EXCAVATOR

Tire Size	Rim Size	Overall Diameter [mm]	Section Width [mm]	Static Load (Kg)	Load Capacity 10 km/h [kg]
10.00-20	7.0/7.5/8.0-20	1,005	240	7,550	5,450
12.00-20	8.0/8.5-20	1,092	256	9,515	6,865

N.B.: Can also be purchased as dual assembly

EXCAVATOR XL

Tire Size	Rim Size	Overall Diameter [mm]	Section Width [mm]	Static Load (Kg)	Load Capacity 10 km/h [kg]
8.25-20	6.5-20	950	228	5,510	3,980
9.00-20	6.5/7.0-20	994	208	6,795	4,905
10.00-20	7.0/7.5/8.0-20	1,023	253	7,550	5,450
12.00-20	8.0/8.5-20	1,093	278	9,515	6,865

N.B.: Excavator and Excavator XL are not for use on forklift trucks



Follow us



Yokohama TWS S.p.A.
Via Nazionale Tiburtina, 143 - 00019 Villa Adriana - Tivoli (RM), Italy
Phone: +39 0774 3841 – info.tws@yokohama-tws.com
www.trelleborg-tires.com

