



TRELLEBORG

Trelleborg



TM600 Reliability at first sight



The TM600 range is the ideal solution for mid-range tractors, delivering an impressive combination of strength and efficiency.



**PREMIUM
TRACTION**



**SUPERIOR
FLOTATION**



**EXCELLENT
COMFORT**



**REDUCED
ENVIRONMENTAL IMPACT**

High traction capacity for maximum crop protection

The shape, geometry, number and depth of TM600's lugs have been carefully designed to guarantee high traction capability in all soil conditions.

The chart below shows the higher traction of Trelleborg TM600 tires compared to the same sizes of premium brand competitors.


Traction in field - Index

Higher is better



Time to plow 741 ac

Lower is better

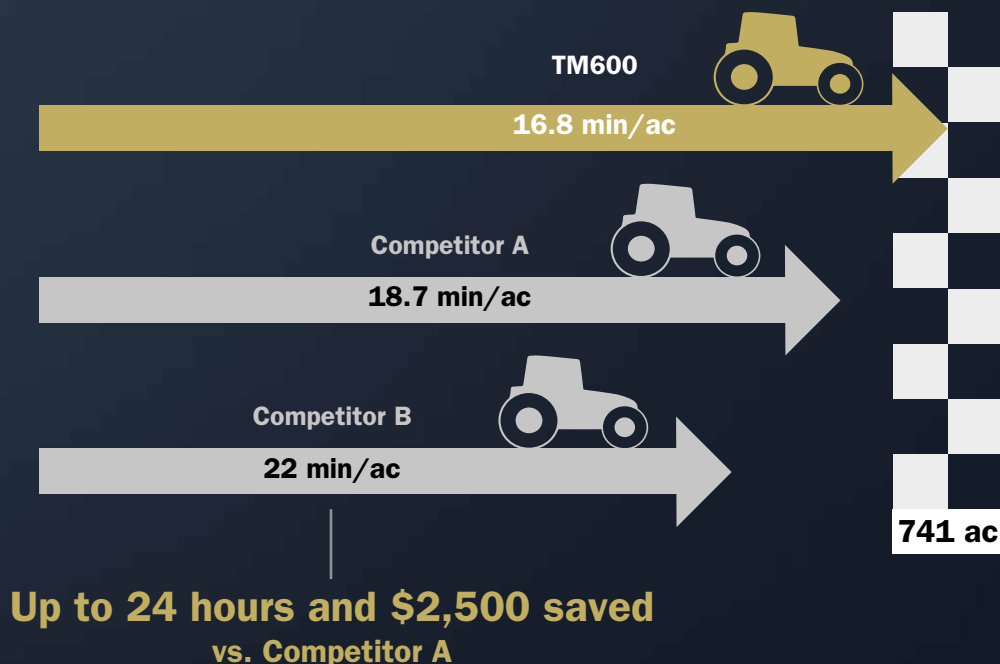

Enhancing soil health

- 1 The rounded shoulder of the lug has been designed to minimize damage to grass and crops as well as maintaining good lateral stability and traction.



- 2 The geometry of the inter-lug terraces enhances the tire's self-cleaning performance on muddy soil.




Minimum soil compaction, maximum lightness

The TM600 guarantees consistent soil contact and high flotation performance, effectively minimizing compaction and safeguarding soil health.

To achieve these benefits, the lug surface area has been designed to minimize the contact pressure value in the center of the tread.


Footprint comparison

Higher is better

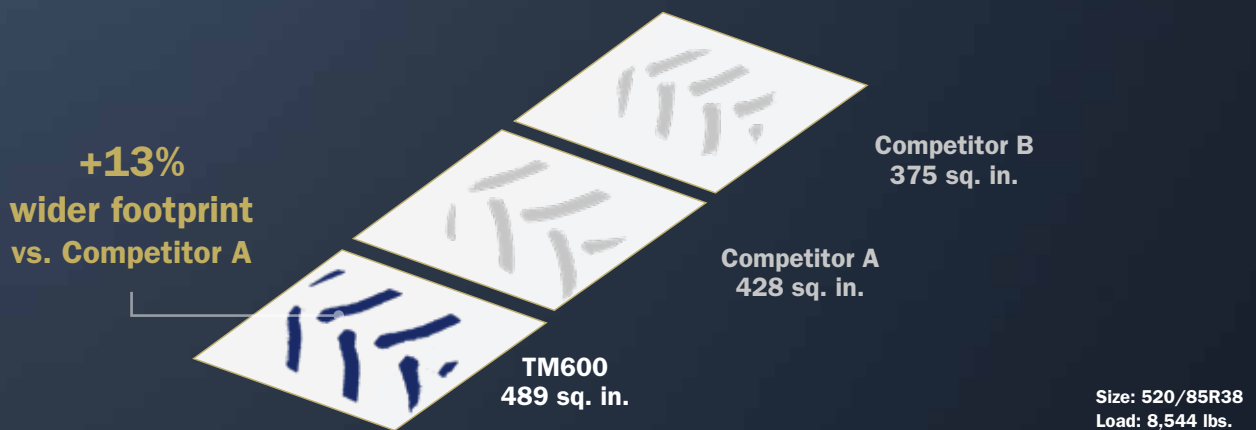

Soil compaction - Index

Lower is better

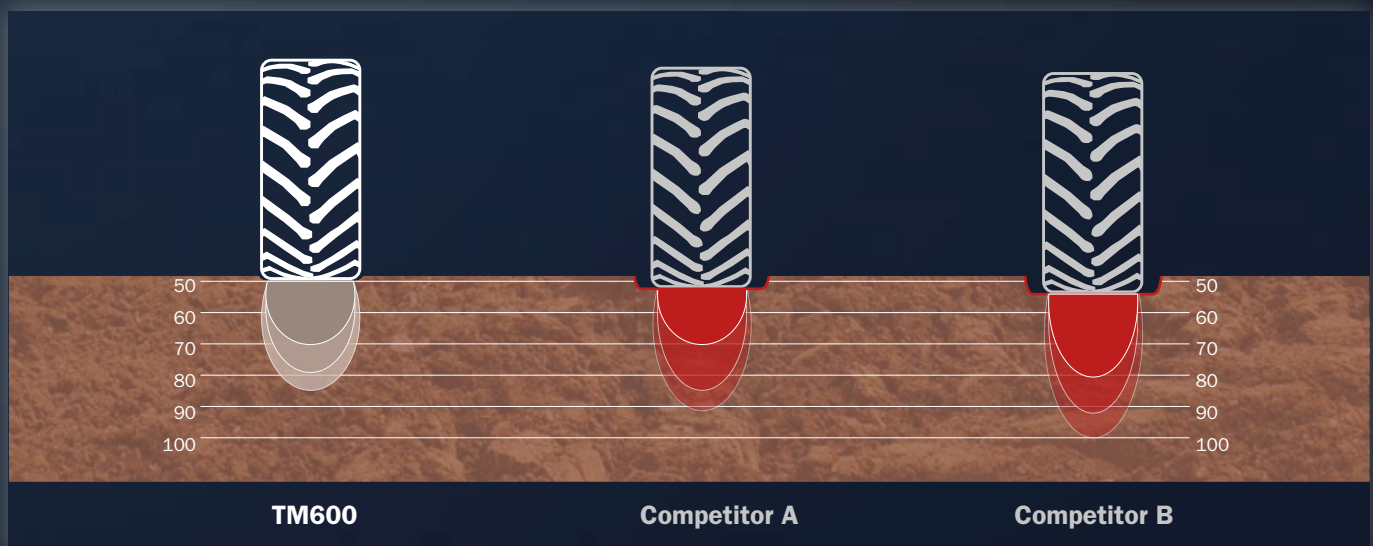

-8% vs. Competitor A

Size: 520/85R38

Exceptional comfort

Over the years, the TM600 has not only delivered great performance in the fields but also on the road, ensuring high comfort throughout the complete lifetime of the tire.

In addition to exceptional comfort, the TM600 has great handling performance in terms of steering and cornering stability.

This results in a very good driver experience and delivers a better handling when compared to premium brand competitors.

Comfort performance - Index

Higher is better



Reference sizes: 380/85R28 - 460/85R38

Handling performance - Index

Higher is better



Rear size: 460/85R38

TM600

Size	Tread Pattern	SW Inches	OD Inches	SLR Inches	RC Inches	SRI	Rim	Permitted Rims	Type	Tube
210/95R16 106A8 (106B)	TM600	8.3	31.5	14.3	95.1	390	W7	W6 - 5.50F	TUBELESS	
210/95R18 108A8 (108B)	TM600	8.3	33.7	15.4	100.6	410	W7	W6 - 5.50F	TUBELESS	
280/85R20 112A8 (109B) (11.2R20)	TM600	11.6	38.8	17.7	116.3	475	W10	W9 - W8 - DW10	TUBELESS	11.2-20 TR218
320/85R20 119A8 (116B) (12.4R20)	TM600	13	41.4	18.5	124.4	500	W11	W10 - W9 - DW11	TUBELESS	11.2-20 TR218
250/85R24 112A8 (109B)	TM600	9.6	40.7	18.3	122.6	500	W8	W7 - W9	TUBELESS	9.5R24 TR218
280/85R24 115A8 (112B) (11.2R24)	TM600	11.5	42.8	19.4	129	525	W10	W9 - W8 - DW10	TUBELESS	11.2-24 TR218
320/85R24 122A8 (119B) (12.4R24)	TM600	13	45.4	20.3	136.4	550	W11	W10 - W9 - DW10 DW11	TUBELESS	12.4/13.6-24 TR218
340/85R24 125A8 (122B) (13.6R24)	TM600 TM600 HD	13.9	46.8	21.3	139.6	575	W12	W11 - DW11 - DW12	TUBELESS	13.6/14.9-24 TR218
380/85R24 131A8 (128B) (14.9R24)	TM600	15.4	49.4	22	147.6	600	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9/16.9-24 TR218
420/85R24 137A8 (134B) (16.9R24)	TM600	17.2	52.1	23.2	156.3	625	W15L	W14L - DW14L DW15L	TUBELESS	16.9-24 TR218
280/85R28 118A8 (115B) (11.2R28)	TM600	11.5	46.7	21.3	140.9	575	W10	W9 - DW10	TUBELESS	11.2/12.4-28 TR218
320/85R28 124A8 (121B) (12.4R28)	TM600	13	49.4	22.3	149.4	600	W11	W10 - W9 - DW10 DW11	TUBELESS	12.4-28 TR218
340/85R28 127A8 (124B) (13.6R28)	TM600 TM600 HD	13.9	50.7	23.4	153	625	W12	W11 - DW11 - DW12	TUBELESS	13.6/12.4-28 TR218
380/85R28 133A8 (130B) (14.9R28)	TM600	15.4	53.4	24.2	160.8	650	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9/16.9-28 TR218
420/85R28 139A8 (136B) (16.9R28)	TM600 TM600 HD	17.2	56.1	25	168.9	675	W15L	W14L - DW14L DW15L	TUBELESS	16.9-28 TR218
380/85R30 135A8 (135B) (14.9R30)	TM600 ProgressiveTraction®	15.4	55.4	25	166.9	675	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9-30 TR218
380/85R30 135A8 (135B) (14.9R30)	TM600	390	1408	635	4238	675	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9-30 TR218
420/85R30 140A8 (137B) (16.9R30)	TM600 TM600 HD	17.2	58.1	26	175.4	700	W15L	W14L - DW14L - DW15L	TUBELESS	16.9/18.4-30 TR218
420/90R30 147A8 (147B)	TM600	17.1	59.8	27.2	180.3	700	DW13	W13 - W14L - DW14L	TUBELESS	18.4-30 TR218
460/85R30 145A8 (142B) (18.4R30)	TM600	18.7	60.8	27.2	184.2	725	W16L	W15L - DW15L DW16L	TUBELESS	18.4-30 TR218
380/85R34 137A8 (137B) (14.9R34)	TM600	15.4	59.6	26.9	180.1	725	W12	W13	TUBELESS	16.9-34 TR218
380/85R34 142A8 (142B) (14.9R.3A)	TM600	15.4	59.6	27.3	179.7	725	W12	W13	TUBELESS	
420/85R34 142A8 (139B) (16.9R34)	TM600	17.2	62.1	28.1	186.8	750	W15L	W14L - DW14L DW15L	TUBELESS	16.9-34 TR218
420/85R34 147A8 (147B)	TM600	17.5	62	28.5	186.4	750	W15L	W14L - DW14L DW15L	TUBELESS	16.9-34 TR218
460/85R34 147A8 (144B) TM600 HD	TM600 TM600 HD	18.7	64.8	29.3	194.7	775	W16L	W15L - DW15L - DW16L	TUBELESS	16.9/18.4-34 TR218
320/85R38 129A8 (126B) (12.4R38)	TM600	12.8	59.8	27.2	181.3	725	W11	W10 - W9 - DW10 DW11	TUBELESS	12.4/16.9-38 TR218
340/85R38 133A8 (130B) (13.6R38)	TM600	13.9	60.7	28	183.7	750	W12	W11 - DW11 DW12	TUBELESS	13.6/16.9-38 TR218
380/80R38 142A8 (142B)	TM600	14.8	62	28.5	187.6	750	W12	W11 - W13 DW11 - DW12 - DW13	TUBELESS	14.9/16.9-38 TR218
380/85R38 144A8 (144B) (14.9R38)	TM600	15.7	63.4	28.7	192.9	775	W13	W11 - W12 DW11 - DW12 - DW13	TUBELESS	16.9-38 TR218
380/95R38 147A8 (147B)	TM600 ProgressiveTraction®	15.4	65.9	30	197.6	800	W12	W13	TUBELESS	
400/75R38 138A8 (135B) (15.5R38)	TM600	15.6	61.6	27.8	183.9	750	DW14L	W14L	TUBELESS	
420/85R38 144A8 (141B) (16.9R38)	TM600	17.2	66.1	29.9	199.2	800	W15L	W14L - DW14L DW15L	TUBELESS	16.9-38 TR218
420/85R38 149A8 (149B)	TM600 ProgressiveTraction®	17.3	65.6	30.2	196.9	800	W14L	DW14L - W15L DW15L	TUBELESS	
460/85R38 149A8 (146B) (18.4R38)	TM600 TM600 HD	18.7	68.8	31.5	207.1	825	W16L	W15L - DW15L DW16L	TUBELESS	18.4-38 TR218
480/80R38 149A8 (149B)	TM600 ProgressiveTraction®	19.5	69.3	30.9	206.1	825	W16A	W15 - DW15 - DW16	TUBELESS	
520/85R38 155A8 (152B) (20.8R38)	TM600 TM600 HD	22.1	72.8	32.3	218.5	875	DW18L	W16L - W18L DW16L	TUBELESS	20.8-38 TR218
520/85R38 155A8 (152B) (20.8R38)	TM600 ProgressiveTraction®	21.1	72.8	32.5	216.9	875	DW18L	W16L - W18L - DW16L	TUBELESS	20.8-38 TR218
480/80R42 151A8 (151B) (18.4R42)	TM600 TM600 HD	19.5	72.8	32.8	218.5	875	W16A	DD16 - DW16B - DW16L	TUBELESS	18.4/20.8-42 TR218
520/85R42 157A8 (157B) (20.8R42)	TM600 TM600 HD	21.1	76.9	34.7	231	925	DW18L	W16L - W18L DW16L	TUBELESS	20.8-42 TR218
480/80R46 158A8 (158B) (18.4R46)	TM600	19.5	77.36	34.9	234.3	925	W16A	DD16 - DW16B	TUBELESS	
520/85R46 158A8 (158B) (20.8R46)	TM600	21.1	80.5	35.6	242.5	975	DW16L	W16L - W18L - DW16L DD16L - DD18L	TUBELESS	
480/80R50 159D	TM600	19.7	80.5	36.8	243.7	975	DW15B	DW16B	TUBELESS	
480/80R50 159A8 (159B)	TM600 Rice ProgressiveTraction®	19.3	80.5		243.5	975	DW15B		TUBELESS	
480/95R50 164A8 (164B)	TM600 ProgressiveTraction®	19.7	84.6	38.7	255.5	1075	DW16B	DW16A - DW15A - DW15B	TUBELESS	

HD = Heavy Duty version



Printed on recycled paper



Discover our website

Follow us



Yokohama TWS North America, Inc.
107 Audubon Road – Building 2 – Suite 205 – Wakefield, MA 01880
866-633-8473 – info.twsa@yokohama-tws.com
www.trelleborg-tires.com/en-us